


Parameters	Unit	Values			
Center Wavelength	nm	1310	1480	1550	
Operating Wavelength Range	nm	±40			
Working Distance	mm	5	or Specify		
Typ. Insertion Loss @ 5mm	dB	0.20			
Max. Insertion Loss @ 5mm	dB	0.25			
Max. PDL	dB	0.02			
Min. Return Loss	dB	60			
Fiber Type	/	SMF-28e Fiber			
Max.Optical Power	W	0.5	3	5	10
Max. Peak Power	kW	0.5	1	5	10
Tensile Load	N	5			
Fiber Length	m	1.8	2.5		
Operating Temperature	℃	-5 to +65			
Storage Temperature	℃	-40 to +85			

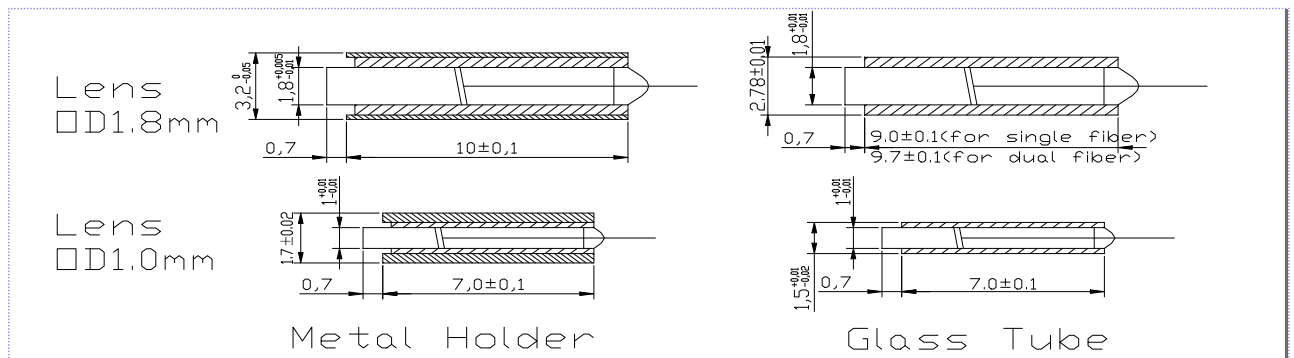

C-(1)(1)-(2)(3)(3)-(4)(5)(5)-(6)-(7)-(8)-(9)(9)-(10)(10)

①①: Wavelength

31 - 1310nm

55 - 1550nm

⑤⑤: Working Distance ⑧: Fiber Type

05 - 5mm B - 250um Bare Fiber

S - Specify L - 900um loose tube

⑧: Fiber Type

B - 250um Bare Fiber

L - 900um loose tube

Fiber Collimator

S - Specify

②: Pigtail Type

S - Single fiber pigtail

D - Dual fiber pigtail(Only for 0.5W)

⑥: Package Type

M - Metal Holder

G - Glass Tube

⑨⑨: Fiber Length

10 - 1.0m

18 - 1.8m

S - Specify

③③: Lens Diameter

10 - 1.0mm(for single fiber only)

18 - 1.8mm

⑦: Connector Type

1 - FC/UPC

2 - FC/APC

3 - SC/UPC

4 - SC/APC

N - None

S - Specify

⑩⑩:Optical Power

Z5 - 0.5W

10 - 10W

S - Specify

④: Lens Type

G - G Lens

C - C Lens